

LED Power Supply – DALI DT6 Dimming




Highlights:

- Constant Voltage design.
- AC input Voltage range 180-250Vac.
- Protections: Short circuit/ Overload/ Over current/
- Cooling free air convection.
- Aluminum profile housing
- IP20 grade for indoor project lighting installation.
- Lifespan 50,000 hrs.
- DALI DT6 Dimming


SPECIFICATION		IBDB-60-12	IBDB-60-24
OUTPUT	Rated DC voltage	12V±0.5V	24V±0.5V
	Current range	0-5A	0-2.5A
	Rated Power	60W	
	Ripple & Noise	≤ 120mVp-p	≤ 240mVp-p
	Setup, Rise time	50ms/230VAC	
	Hold up time	20ms/230VAC	
INPUT	Voltage range	AC180-250V	
	Frequency range	50-60HZ	
	Startup time	< 1.5s at full load condition	
	Efficiency (Tpy.)	≥84%	≥86%
	Power factor	0.65(max)	
	Leakage current	0.25mA/230VAC	

PROTECTION	Over Current	105%-130% (Protection type: Hiccup mode)
	Reset After Shutdown	after the fault has been removed
ENVIRONMENT	Working TEMP.	-10°C-50°C
	Storage TEMP.	-40°C-80°C
	Working Humidity	0--98%
	Vibration	10-500HZ, 2G 10min/1cycle, preiod for 60min, each along X,Y,Z axes
	TEMP. coefficient	±0.03%/°C (0-50°C)
SAFETY&EMC	Safety Standards	Design refer to LVD EN61347-2-13:2006, EN61347-1:2008
	With stand Voltage	I/P-O/P:1.5KVAC, I/P-COVER:1.5KVAC, O/P- COVER:500VDC
	Isolation Resistance	I/P-O/P:>100M Ohms/500VDC/25°C /70% RH
	EMC	EN55015:2006/A2:2009, EN61000 -3- 2:2006/A2:2009, EN61000 -3-3:2008, EN61547:2009
OTHERS	MTBF	50,000 Hours (25°C)
	Dimension	187*48*29mm (L*W*H)
	Weight	259g
	Packaging	39*37*20.5cm/50PCS


Dimension (Unit: mm)

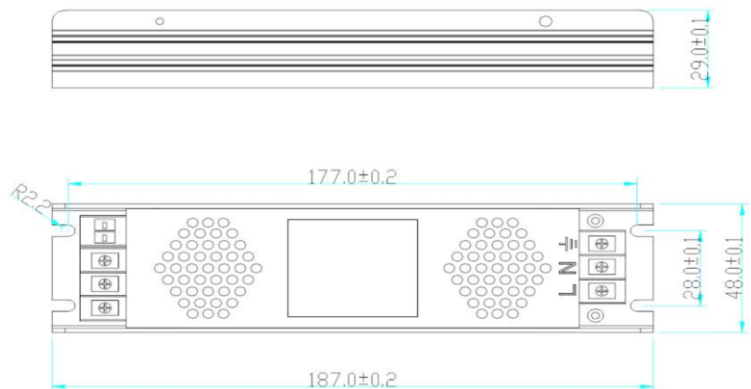

Connection method:

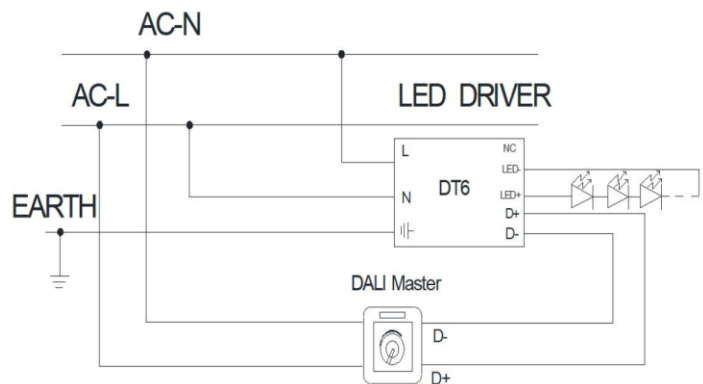

Load derating curve:

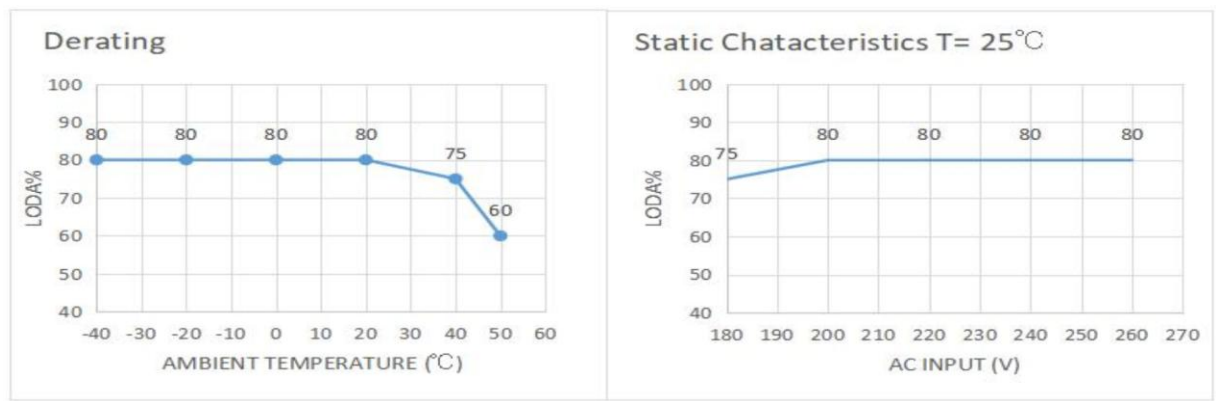

Edition

Data is subject to change without notice.
Please contact us for detailed information.

Release Date	Issuance of Category
2026.08.01	The 1st. Version